



# KV-17

## BUTTERFLY VALVE/WAFER TYPE

### GENERAL FEATURES

The closing element in the butterfly valves is a rotating shaft that is placed on a vertical axis. The sealing is provided between the metal flap and the elastic or plastic sealing elements covering the inside of the body. The sealing element also serves as a flange seal between the valve and the pipe.

Advantages of such valves are; low pressure loss, easy opening and closing, good sealing, light weight and small footprint.

The Ayvaz KV-17 Wafer Type Butterfly Valves should be checked to see if they are moving freely during the installation. The valve stem may be horizontal or vertical. However, horizontal installation on DN300 should be preferred.

**Product Material**

**Body:** GGG-40.3 Cast Iron

**Stem:** DN40-DN300=SS420 / DN350-DN600=SS431

**Disc:** Aluminium Bronze

**Connection:** Wafer Type

**Max. Working Temperature:** 80 °C

**Application Areas**

- Heating,ventilating and air conditioning systems
- Water treatment and distributing systems
- Mining industry
- Shipbuilding and drilling plant
- Sugar industry,food and chemistry industries
- Fire extinguisher systems
- Water, dust, gas, waste water and air

**Notes:**

It is recommended to use reducer type for DN 125, DN 150, DN 200 diameters in butterfly valves. There are only reducer type production on DN200 and above for KV 17 Butterfly valves.

**Actuator Types**


- Hand operated
- Reducer
- Single Action Pneumatic Actuator
- Double Action Pneumatic Actuator
- With Electric Actuator / On-Off (Manual Arm)

| Pressure Class | Dia. (mm)      |
|----------------|----------------|
| PN16           | DN (DN 40-300) |
| PN10           | DN (350-600)   |


| Gasket Material | Min. Temp. (°C) | Max. Temp. (°C) |
|-----------------|-----------------|-----------------|
| NBR             | -10             | 80              |

# KV-17 BUTTERFLY VALVE/WAFER TYPE

DN25-DN150

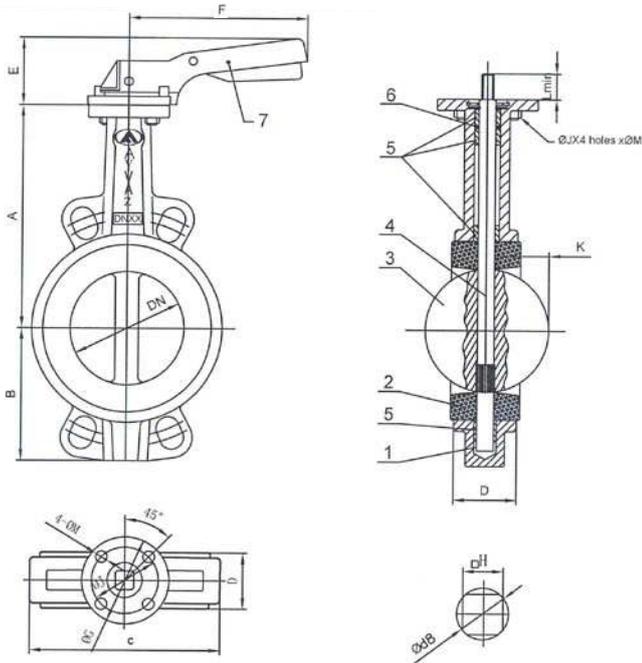

DN200-DN300

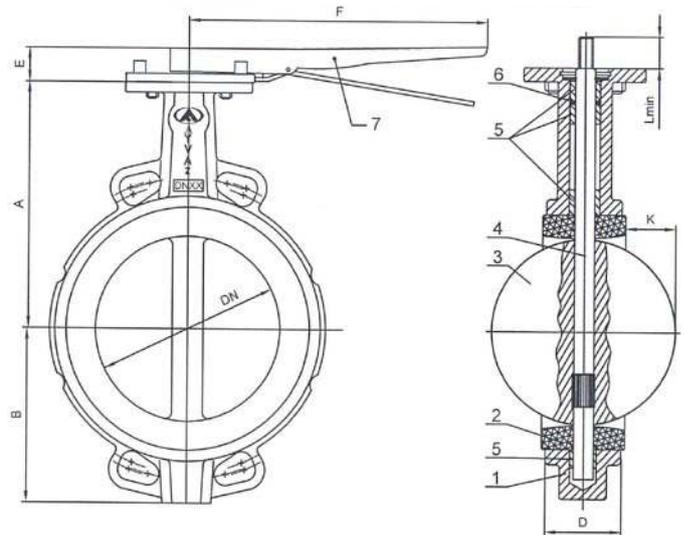


| Product Material |        |                                      |
|------------------|--------|--------------------------------------|
| 1                | Body   | EN-GJS-400-18                        |
| 2                | Gasket | NBR                                  |
| 3                | Disc   | Aluminium Bronze                     |
| 4                | Shaft  | DN40-DN300=SS420 / DN350-DN600=SS431 |
| 5                | Ring   | Teflon                               |
| 6                | O-Ring | NBR                                  |
| 7                | Lever  | Aluminium / Forged Iron              |

| DN  | A     | B     | K     | D  | E  | F   | ØG  | H     | ØJ  | Lmin | ØM | Ød8  | kg   |
|-----|-------|-------|-------|----|----|-----|-----|-------|-----|------|----|------|------|
|     | ±2    | ±2    | ±2    | ±1 | ±1 | ±1  | ±1  | ±0.5  | ±1  | ±1   | ±1 | ±0.5 |      |
| 40  | 130   | 61    | 2.65  | 33 | 70 | 195 | 65  | 9x9   | 50  | 32   | 7  | 11.8 | 2    |
| 50  | 136,5 | 77    | 2.9   | 43 | 70 | 195 | 65  | 9x9   | 50  | 32   | 7  | 11.8 | 2.5  |
| 65  | 142   | 87,5  | 6.9   | 46 | 70 | 195 | 65  | 9x9   | 50  | 32   | 7  | 11.8 | 2.9  |
| 80  | 158   | 95    | 14.5  | 46 | 70 | 195 | 65  | 9x9   | 50  | 32   | 7  | 11.8 | 3.4  |
| 100 | 180   | 107   | 23.7  | 52 | 70 | 195 | 65  | 11x11 | 50  | 32   | 7  | 14.5 | 4.3  |
| 125 | 192   | 121,5 | 32.3  | 56 | 71 | 278 | 90  | 14x14 | 70  | 42   | 9  | 18.9 | 6.6  |
| 150 | 215   | 144   | 48    | 56 | 71 | 278 | 90  | 14x14 | 70  | 42   | 9  | 18.9 | 7.8  |
| 200 | 241,5 | 171   | 68.7  | 60 | 40 | 355 | 125 | 17x17 | 102 | 36   | 11 | 22.5 | 14.5 |
| 250 | 280   | 205   | 88.8  | 68 | 44 | 507 | 150 | 22x22 | 125 | 38   | 13 | 29.8 | 25   |
| 300 | 310   | 235   | 109.8 | 78 | 44 | 507 | 150 | 27x27 | 125 | 38   | 13 | 31.6 | 34   |

# KV-17 BUTTERFLY VALVE/WAFER TYPE


DN350-DN600

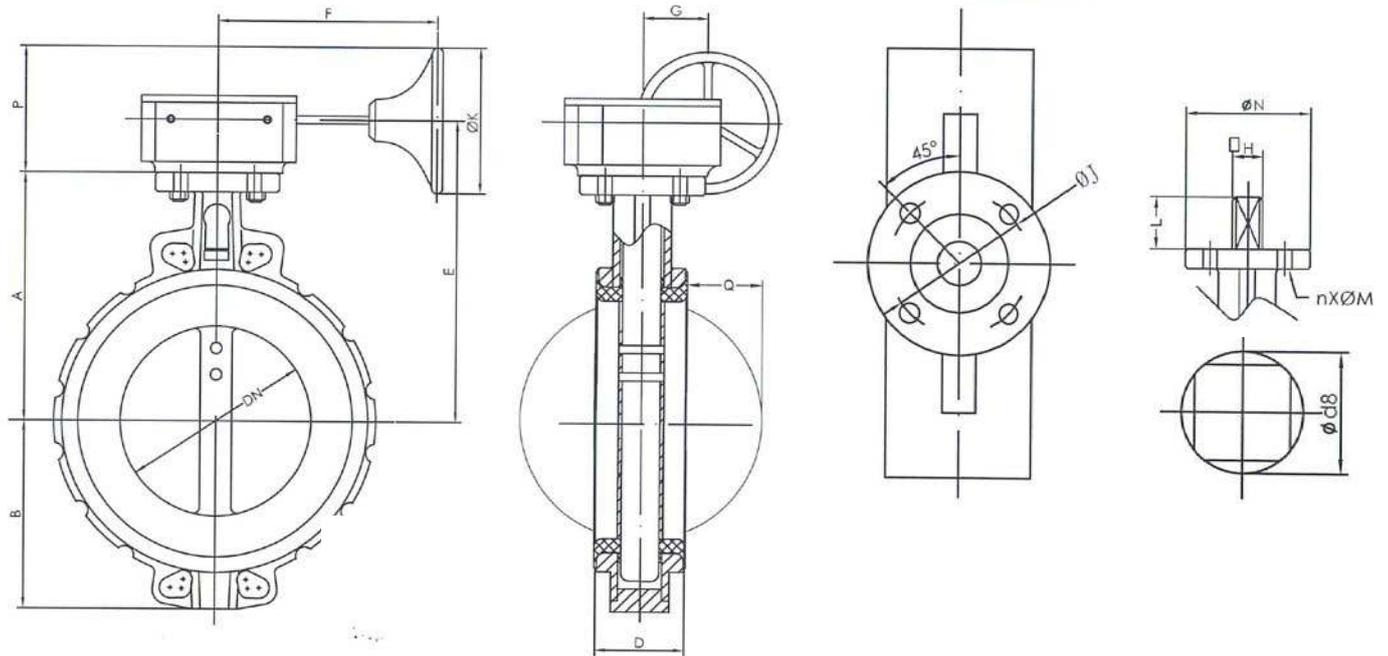

| DN  | A   | B   | D   | E   | F   | G   | P   | ØK  | ØJ  | H     | ØN  | Ød8   | Q     | L  | nxØM  | kg     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-------|-----|-------|-------|----|-------|--------|
| 350 | 334 | 260 | 78  | 379 | 223 | 78  | 190 | 300 | 125 | 27x27 | 150 | 31.6  | 127.8 | 45 | 4xØ14 | 54.5   |
| 400 | 361 | 307 | 88  | 423 | 270 | 120 | 208 | 400 | 125 | 27x27 | 150 | 33.2  | 143.8 | 50 | 4xØ14 | 89.85  |
| 450 | 401 | 339 | 114 | 463 | 270 | 120 | 258 | 400 | 165 | 30x30 | 210 | 37.94 | 163.3 | 50 | 4xØ22 | 107.4  |
| 500 | 480 | 368 | 127 | 545 | 339 | 120 | 222 | 300 | 165 | 36x36 | 210 | 41.12 | 182.4 | 65 | 4xØ22 | 155.75 |
| 600 | 656 | 459 | 154 | 630 | 339 | 120 | 222 | 300 | 165 | 46x46 | 300 | 50.62 | 219.3 | 70 | 4xØ22 | 231.1  |

# KV-17 BUTTERFLY VALVE/WAFER TYPE


## Screw Connection Dimensions

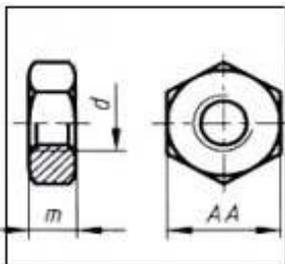

| d (mm) | M10 | M12 | M16 | M20 | M24 |
|--------|-----|-----|-----|-----|-----|
| AA     | 17  | 19  | 24  | 30  | 36  |
| m      | 8   | 10  | 13  | 16  | 19  |

| Dia.<br>mm | Torque (Nm) |        |
|------------|-------------|--------|
|            | 10 Bar      | 16 Bar |
| 25         | 9           | 10     |
| 32         | 9           | 10     |
| 40         | 11          | 12     |
| 50         | 15          | 16     |
| 65         | 24          | 26     |
| 80         | 31          | 33     |
| 100        | 48          | 53     |
| 125        | 73          | 81     |
| 150        | 106         | 119    |
| 200        | 177         | 194    |
| 250        | 281         | 308    |
| 300        | 410         | 595    |
| 350        | 475         | 969    |
| 400        | 746         | 1307   |
| 450        | 1112        | 1787   |
| 500        | 1356        | 2288   |
| 600        | 2468        | 3711   |


### Discharge Amount

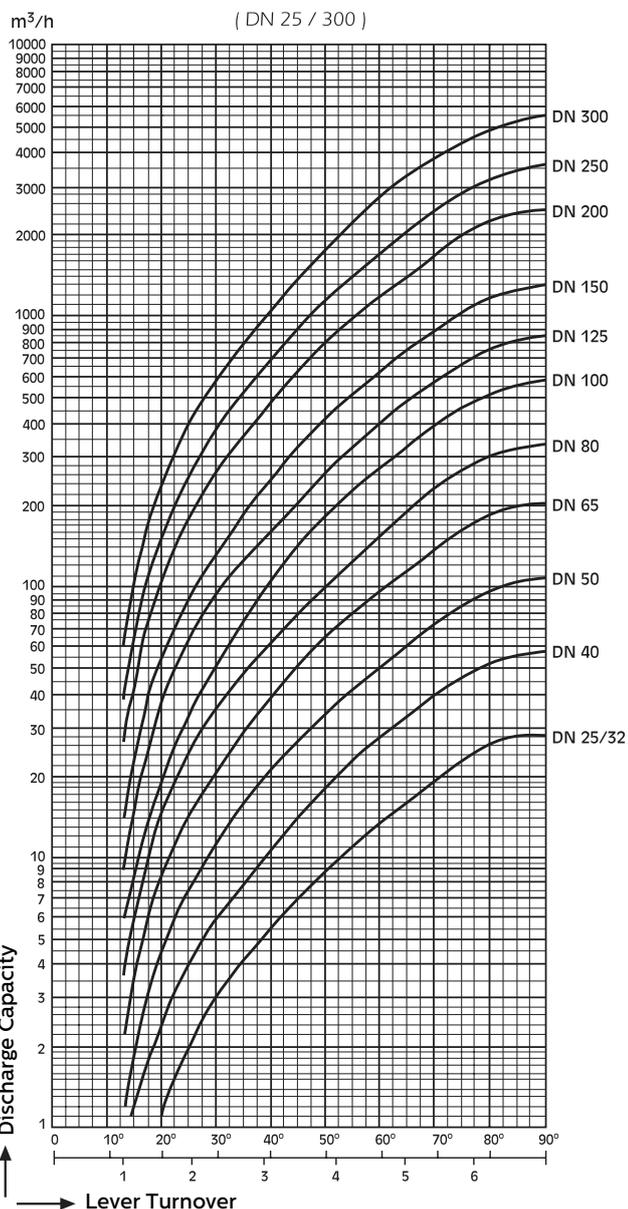

| Pipe Diameter |     | DISC OPENING ANGLE(DEGREE) |     |     |      |      |      |      |      |      |
|---------------|-----|----------------------------|-----|-----|------|------|------|------|------|------|
| MM            | INS | 10                         | 20  | 30  | 40   | 50   | 60   | 70   | 80   | 90   |
| 40            | 1½  | 0,048                      | 2,4 | 5,6 | 12   | 21,6 | 35,2 | 56   | 84   | 92   |
| 50            | 2   | 0,06                       | 3   | 7   | 15   | 27   | 44   | 70   | 105  | 115  |
| 65            | 2½  | 0,10                       | 6   | 12  | 25   | 45   | 75   | 119  | 178  | 196  |
| 80            | 3   | 0,20                       | 9   | 18  | 39   | 70   | 116  | 183  | 275  | 302  |
| 100           | 4   | 0,30                       | 17  | 36  | 78   | 139  | 230  | 364  | 546  | 600  |
| 125           | 5   | 0,50                       | 29  | 61  | 133  | 237  | 392  | 620  | 930  | 1022 |
| 150           | 6   | 0,80                       | 45  | 95  | 205  | 366  | 605  | 958  | 1437 | 1579 |
| 200           | 8   | 2                          | 89  | 188 | 408  | 727  | 1202 | 1903 | 2854 | 3136 |
| 250           | 10  | 3                          | 151 | 320 | 694  | 1237 | 2047 | 3240 | 4859 | 5340 |
| 300           | 12  | 4                          | 234 | 495 | 1072 | 1911 | 3162 | 5005 | 7507 | 8250 |

# KV-17 BUTTERFLY VALVE/WAFER TYPE


## 3D APPLICATION SAMPLE - 1

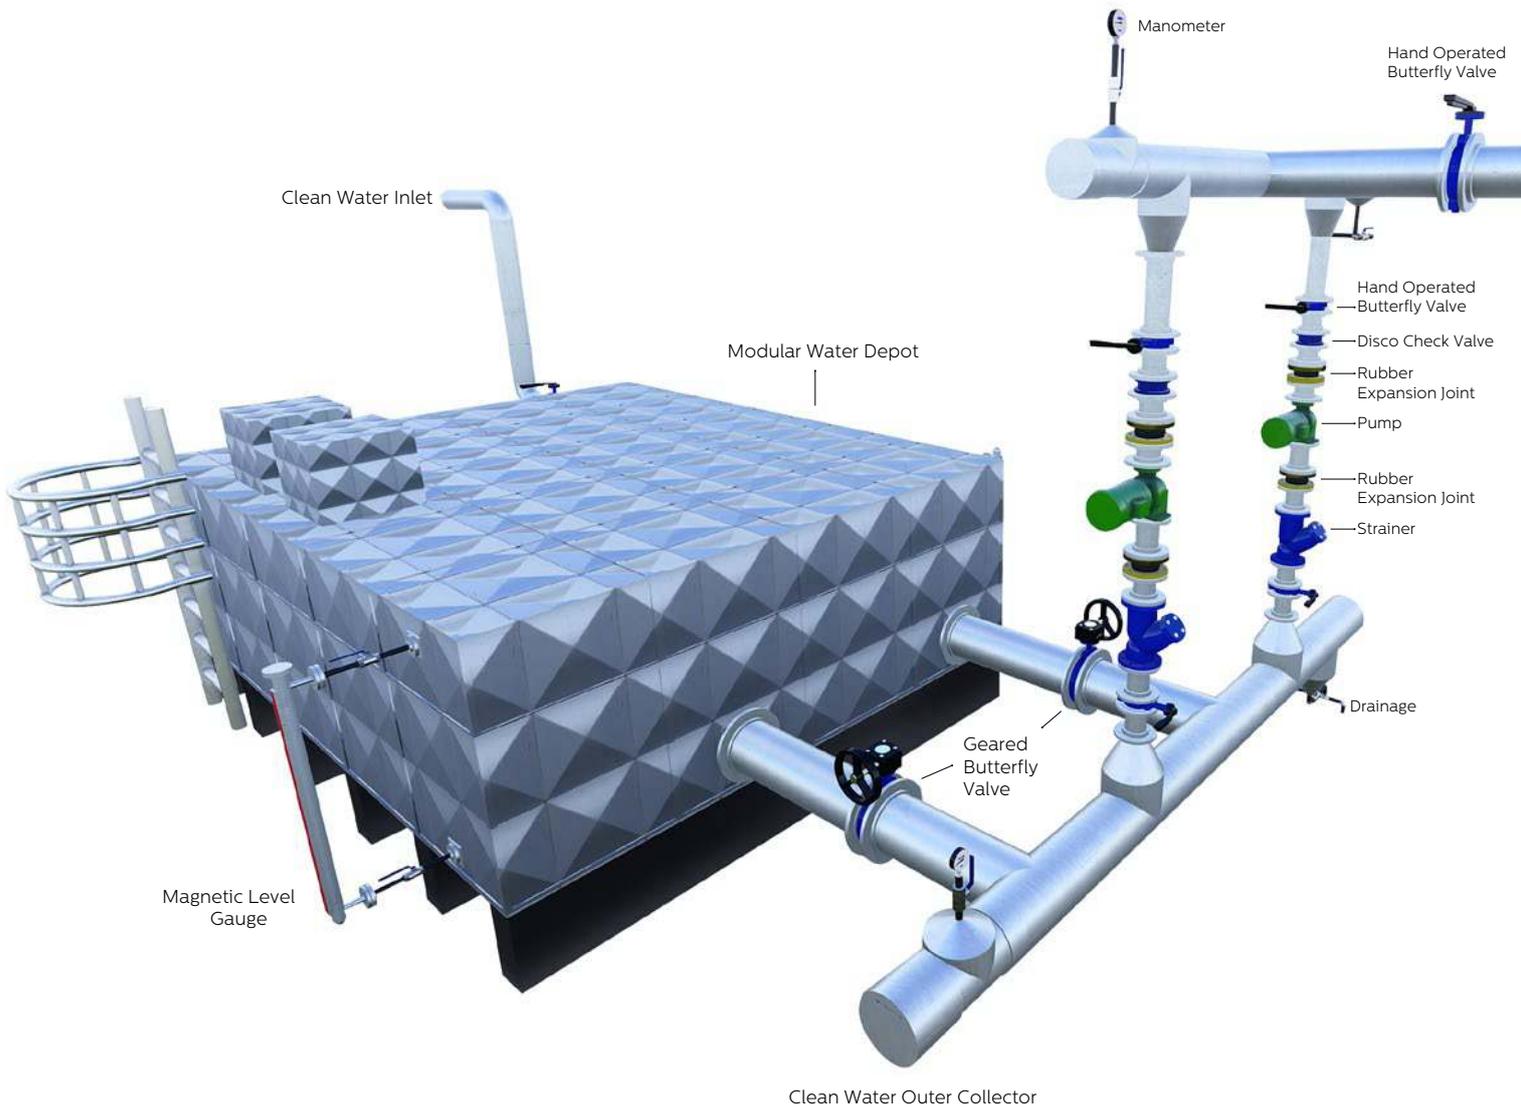

# KV-17 BUTTERFLY VALVE/WAFER TYPE


---

## 3D APPLICATION SAMPLE- 2

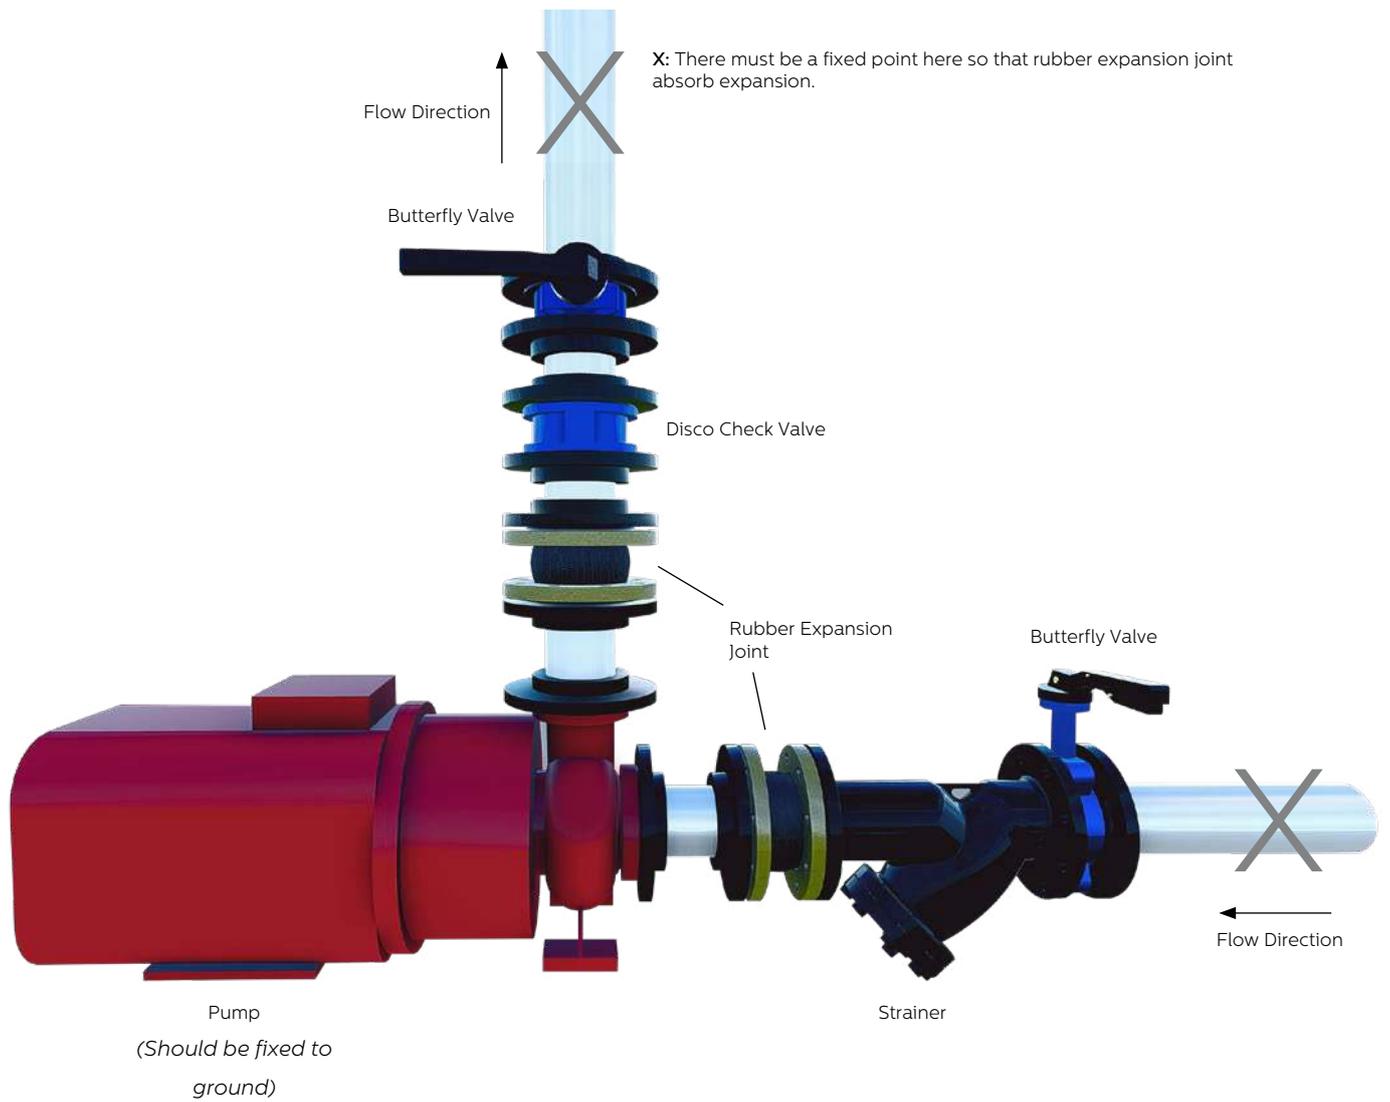


# KV-17 BUTTERFLY VALVE/WAFER TYPE

## INSTALLATION 1

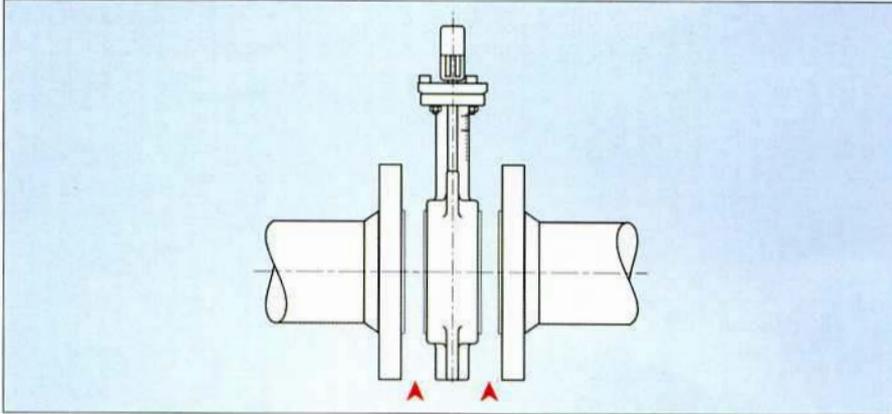


When mounting the valve on the mounting surface, make sure that there is sufficient clearance between the flanges. Valve surfaces that are attempted to be installed without sufficient distance may be damaged.

## INSTALLATION 2

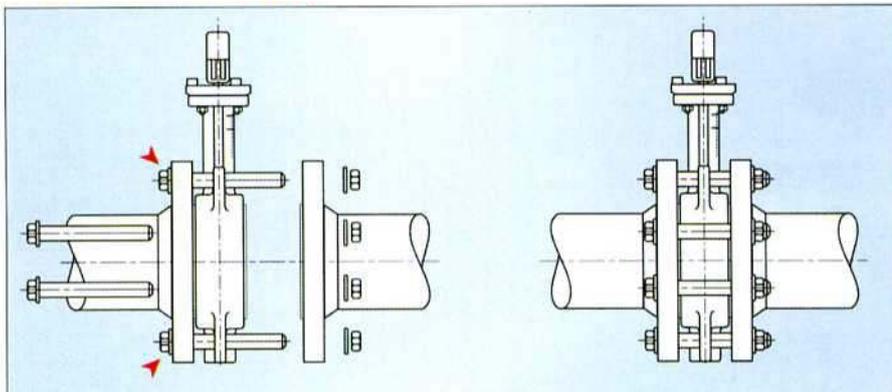

During assembly, first assemble the valve with a flange bolt, but do not tighten the bolts, as a second warning, set the body to center the pipe. Then tighten the nuts in the opposite direction, crosswise, until the valve body and pipe flange surfaces touch each other.


## INSTALLATION 3

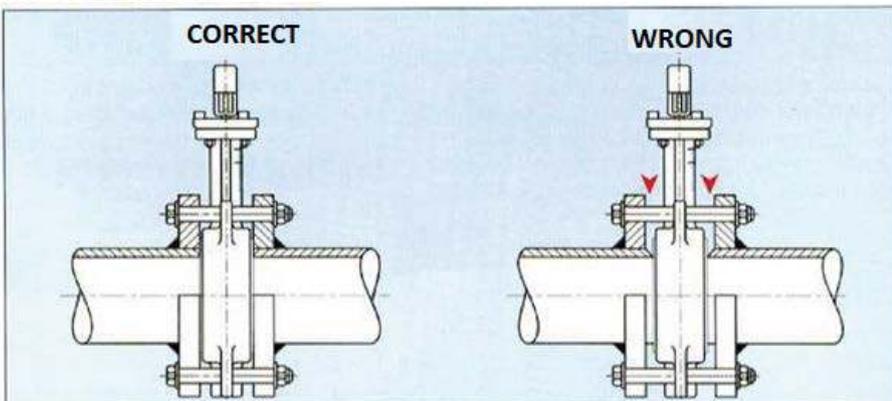

On the pipe surfaces where the butterfly valve is to be mounted, it is absolutely necessary to avoid the sharp points of the pipe ends and the diameters of the pipe. Pointed spikes and burrs on the pipe mounting surface can cause the rubber surfaces of the butterfly valve to be destroyed.


# KV-17 KELEBEK VANA/WAFER TİP

## INSTALLATION 4

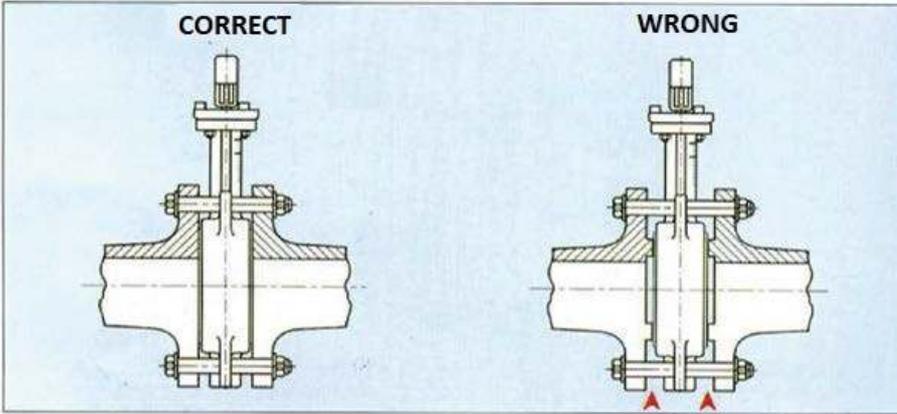

Installation the butterfly valve, it is important to use the correct connecting flange while the valve. The connection flange to be used must cover the maximum surface area of the butterfly valve.

## INSTALLATION 5

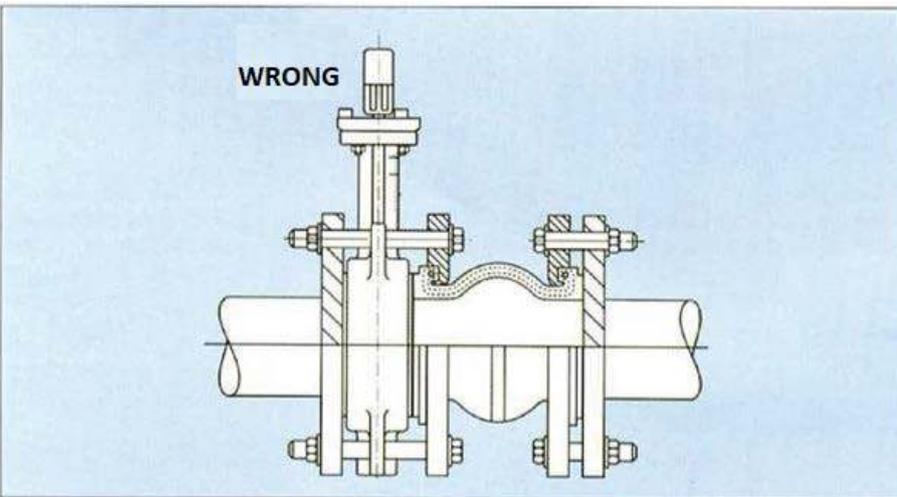

While installing the butterfly valve, it is important to that rubber surfaces do not touch each other. Best installation of butterfly valve is the rubber surface of the valve and the metal surface of the pipe flanges to touching each other. The valve may come in contact with the sealing surface of the rubber compensator and may not close.



### HEAD OFFICE - FACTORY

Atatürk Sanayi Bölgesi Hadımköy Mahallesi Mustafa İnan Caddesi No: 44 Arnavutköy - İSTANBUL  
Tel: +90 212 771 01 45 (pbx) | Fax: +90 212 771 47 27  
info@ayvaz.com | www.ayvaz.com

**Cona**  
Caserta/Italy  
Tel: +39 0823 187 3988  
rmolaro@ayvaz.com

**Ayvaz Germany**  
Viernheim/Germany  
Tel: +49 62046014399  
germany@ayvaz.com

**Ayvaz Ukraine**  
Kiev/Ukraine  
Tel: +380 44 390 57 57  
info@ayvaz.com.ua

**Tricorr**  
Warsaw/Poland  
Tel: +48 530 030 810  
+48 533 603 335  
tricorr@tricorr.eu

**Ayvaz Azerbaijan**  
Baku/Azerbaijan  
Tel: +99 (455) 579-84-32  
ahayatov@ayvaz.com

**Ayvaz Egypt**  
Cairo/Egypt  
Tel: +20 122 819 78 29  
andrew.eid@ayvaz.com

**Ayvaz Gulf**  
Dubai/U.A.E  
Tel: +971 563550822  
+971 501306871  
mideast@ayvaz.com

**Ayvaz China**  
Ningbo/China  
Tel: +86 152 5830 7361  
msahin@ayvaz.com

**Ayvaz Kazakhstan LLP**  
Almaty/Kazakhstan  
Tel: +7 (727) 327 97 57  
info\_kz@ayvaz.com

**Ayvaz N**  
Ispirih/Bulgaria  
Tel: +359 8431 27 32  
office@ayvaz-n.eu

**Ayvaz Serbia**  
Belgrade/Serbia  
Tel: +381 61 658 70 52  
yakbiyik@ayvaz.com

**Ayvaz Vietnam**  
HCMC/Vietnam  
Tel: +84 89 8508345

**Ayvaz Americas**  
Rhode Island/USA  
Tel: +1 401 737 8380  
americas@ayvaz.com